


Propafilm™ FFB

Data

Fast Seal Coated White Pigmented Film

White pigmented biaxially oriented polypropylene (BOPP) film with a fast seal coating on one side and an aqueous acrylic coating on the other side.

- Exceptionally wide seal range on fast seal side
- Excellent seal properties in terms of strength, hot tack and integrity
- Totally forgiving on horizontal flow-wrap machines
- Fast sealing seals remain unaffected by changes in climatic conditions
- Good aroma and moisture barrier
- Good optical properties
- Excellent printability on acrylic side
- No seal compatibility between fast seal and acrylic coatings

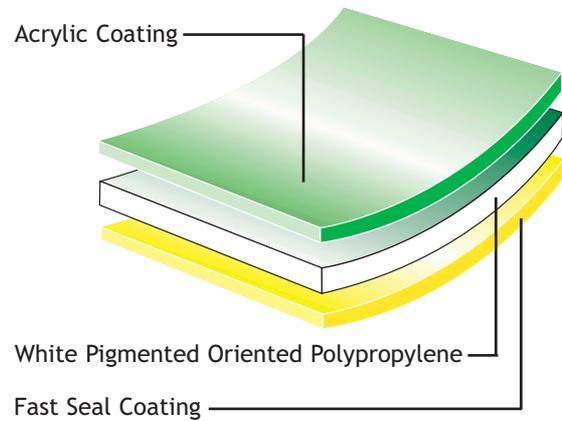

Applications

FFB30 is suitable for use as a single film or in laminate structures for form-fill-seal packaging especially in the bakery, biscuit and confectionery industries, requiring strong seals and excellent seal integrity.

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	FFB
Thickness	Innovia Films test		micron	30
Yield	Innovia Films test		m ² /kg g/m ²	34.1 29.3
Permeability to: Water vapour	ASTM F 1770	23 °C 85% RH 38 °C 90% RH	g/m ² .24 hrs	0.8 4.5
Oxygen	ASTM F 1927	23 °C 85% RH 23 °C 0% RH	cc/m ² .24 hrs	650 750
Optical: Opacity	ASTM D 2923		%	62
Coefficient of friction (film to film)	ASTM D 1894	Dynamic Dynamic	A/A F/F	0.20-0.30 0.50
Sealing range	Innovia Films test	0.1 secs; 0.4 MN/m ²	F/F °C	65-145
Seal strength	Innovia Films test	100 °C; 0.1 secs; 0.4 MN/m ²	F/F g(f)/25mm	>500
Shrinkage	Innovia Films test	60 secs at 120 °C 60 secs at 130 °C	% MD TD MD TD	3.6 1.2 6.8 0.7

All properties are tested under standard laboratory conditions: 23± 2°C; 50± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

MD Machine Direction

TD Transverse Direction

A Acrylic Surface

F Fast Seal Surface

Reel Specifications

Nominal Reel Diameters

Film	Length/(metres)					
	FFB30	1250	2500	5000	7500	10000
Outside Diameter for 77mm Core	240mm	330mm	450mm	ns	ns	ns
Outside Diameter for 153mm Core	ns	ns	475mm	570mm	650mm	785mm

ns = non-standard

Other reel lengths are available subject to negotiation.

Fast Seal Surface

The fast seal surface is available on either the inner or outer surface of Propafilm FFB.

The fast seal surface is indicated by a symbol on a label attached to each reel.

Fast Seal Surface	Ordering Code	Label Symbol
Inside	I	
Outside	O	

Film Storage & Handling

The low heat-seal threshold and wide seal range of Propafilm FFB film allows its use in particularly demanding packaging machine applications.

Care should therefore be taken to protect reels of film from storage temperatures above 30°C and localised sources of heat above 45°C.

Reels of Propafilm FFB should be protected from high levels of moisture and accidental water splashes at all times. The reels should remain in the protective coverings supplied until ready for use on converting or packaging machinery.

Converted reels, in both master and slit reel form should be similarly protected at all times.

Propafilm FFB is suitable for use for 6 months from the date of delivery and stocks should be used in rotation.

Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

Propafilm FFB is suitable for most applications involving direct contact with foodstuffs. For specific enquiries, please refer to literature reference B120 or contact our Technical Services Department.

Health & Safety Guidelines

For Health and Safety information, please refer to literature reference B190.



CERTIFICATE NUMBER Q929

www.innoviafilms.com
 email: filmsinfo@innoviafilms.com
 ™Trademark of Innovia Films Group

Sales Offices

Europe (UK)	Tel +44 (0)16973 42281
Americas (USA)	Tel +1 877 822 3456
Asia-Pacific (Aus)	Tel +61 3 9303 0600

Disclaimer: Innovia Films Ltd or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated.

The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.