


# Propafilm™ MTX

Data

## Anti-Static Overwrapping Film

Biaxially oriented polypropylene (BOPP) film co-extruded on both sides with heat sealable polyolefinic copolymers.

- Superior anti-static protection
- Good puncture and impact resistance
- Excellent sealing properties
- Sparkling appearance
- Good moisture barrier

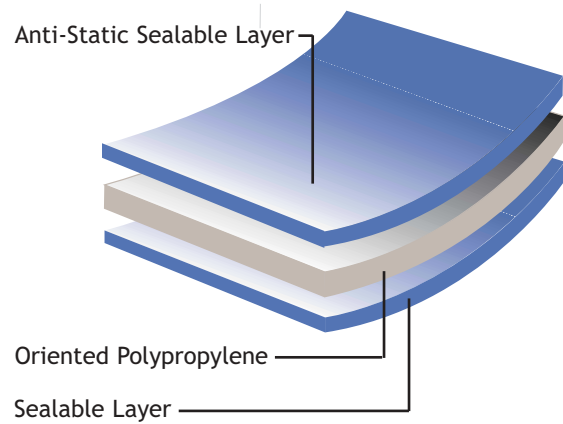

## Applications

MTX22 is suitable for high speed overwrapping of packets/cartons. The high level of anti-static protection enhances machine performance and minimises dust attraction.

## Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	MTX
Thickness	Innovia Films test		micron	22
Yield	Innovia Films test		m <sup>2</sup> /kg g/m <sup>2</sup>	50.0 20.0
Permeability to: Water vapour	ASTM F 1770	23 °C 85% RH 38 °C 90% RH	g/m <sup>2</sup> .24 hrs	1.3 7.3
Oxygen	ASTM F 1927	23 °C 0% RH	cc/m <sup>2</sup> .24 hrs	2500
Optical: Gloss	ASTM D 2457	20°	units	110
Haze (wide angle)	ASTM D 1003	2.5°	%	2.2
Coefficient of friction (out to out)	ASTM D 1894	Static Dynamic		0.35 0.25
Surface conductivity	Innovia Films test	25 °C 50% RH	mho	7 x 10 <sup>-11</sup>
Tensile strength	ASTM D 882	Strain rate 50% / min	MN/m <sup>2</sup> MD TD	200 185
Elongation at break	ASTM D 882	Strain rate 50% / min	% MD TD	85 85
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10% / min	MN/m <sup>2</sup> MD TD	2400 2400
Sealing range	Innovia Films test	2 secs; 0.10 MN/m <sup>2</sup>	°C Out	95-145
Seal strength	Innovia Films test	107 °C; 1 sec; 0.10 MN/m <sup>2</sup>	g(f)/25mm	400
Shrinkage	Innovia Films test	60 secs at 120 °C	% MD TD	4.0 3.5

All properties are tested under standard laboratory conditions: 23± 2°C; 50± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

MD Machine Direction TD Transverse Direction

# Propafilm™ MTX Data

## Reel Specifications

### Nominal Reel Diameters

Film	Length/ (metres)	
	MTX22	2500
Outside Diameter for 77mm Core	295mm	330mm

Other reel lengths are available subject to negotiation.

## Film Storage

No special conditions are required for the storage of Propafilm MTX but it is recommended that dry conditions at temperatures below 30°C are employed. Propafilm MTX is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

## Food Contact

Propafilm MTX is **not** suitable for applications which involve direct contact with foodstuffs. For specific enquiries, please refer to literature reference B110 or contact our Technical Services Department.

## Health & Safety Guidelines

For Health and Safety information, please refer to literature reference B190.



CERTIFICATE NUMBER Q929

[www.innoviafilms.com](http://www.innoviafilms.com)  
 email: [filmsinfo@innoviafilms.com](mailto:filmsinfo@innoviafilms.com)  
 ™Trademark of Innovia Films Group

## Sales Offices

Europe (UK)	Tel +44 (0)16973 42281
Americas (USA)	Tel +1 877 822 3456
Asia-Pacific (Aus)	Tel +61 3 9303 0600

**Disclaimer:** Innovia Films Ltd or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated.

The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.